



## Rear View Camera Instruction Sheet

Tech Support 1-800-265-1818  
<http://usa.vdo.com>


Instruction Sheet # A2C59519842

Rev. -

### Mounting Instructions

1. Remove screws from mounting kit and detach camera from mounting bracket
2. Apply all four screws in the noted regions in order to properly attach the mounting bracket
3. Once the mounting bracket is secure, reattach the camera to the bracket

Apply screws in  
noted regions

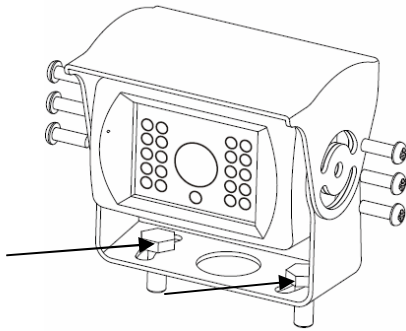

Use 2 screws per side

### Adjustment Instructions

To adjust the cameras viewing angle:

Use a hex head to loosen the screws on both sides of the camera. Once they are loose adjust the camera to the desired angle, and then retighten.

Merchandise warranted against defects in factory workmanship and materials for a period of 24 months after purchase. This warranty applies to the first retail purchaser and covers only those products exposed to normal use or service. Provisions of this warranty shall not apply to a VDO product used for a purpose for which it is not designed, or which has been altered in any way that would be detrimental to the performance or life of the products, or misapplication, misuse, negligence or accident. On any VDO part or VDO product found to be defective after examination by manufacturer, manufacturer will only repair or replace the merchandise through the original selling dealer. Manufacturer assumes no responsibility for diagnosis, removal and/or installation labor, loss of vehicle use, loss of time, inconvenience or any other consequential expenses. The warranties herein are in lieu of any other expressed or implied warranties, including any implied warranty or merchantability of fitness, and any other obligation on the part of manufacturer, or selling dealer.

Read these instructions thoroughly before installation. Do not deviate from assembly. Always disconnect battery ground before making any electrical connections.

### Parts List


<u>Item</u>	<u>Description</u>	<u>Qty</u>
1	Rear View Camera (6-20V) DC	1
2	Mounting Kit	1
3	Instruction Sheet	1

### Connection


To connect the camera to the display:

Take the 4 pin female camera connection and plug it into the 4 pin male connection coming from the display wire harness. Make sure that the small groove on the camera connector lines up with the groove on the display wire harness.

Next tighten the connection by turning the cable lock in a clockwise fashion until the connection is tight.



Camera  
(Female)



Display Wire  
Harness  
(Male)